


## PRORUNNER® Mk5 Vertical Conveyor

The PRORUNNER® Mk5 vertical conveyor guarantees an uninterrupted product flow from one level to another. A patented cam follower system in this elevator features a shock free movement in which products are kept horizontal. This heavy-duty and well designed vertical conveyor is also deliverable in stainless steel and stands for reliability, low maintenance costs and a long life.

Starting at:

**\$9,250.-**

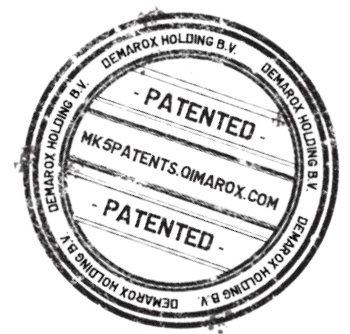

Key Components for material handling:

- Palletising Modules
- Vertical Conveyors
- Pallet Packaging
- Safety Fencing

## Advantages of the PRORUNNER® Mk5

- Line feed and cross feed
- No start-/stop movements
- Easy access to product carrier
- Possibility for in- and outfeed on more than two levels
- Number of carriers provide capacity (not speed)
- Can be used as vertical sorter
- No critical product transitions
- Drive system is closed column
- C-lift or Z-lift line up possible
- Can be used as a cross transfer
- Both line and angle throughput possible
- Carrier remains horizontal



Key Components for material handling:



- Palletising Modules
- Vertical Conveyors
- Pallet Packaging
- Safety Fencing




Specifications		Basic model	Optional up to
Infeed	inch.	27	21
Outfeed	inch.	98	984
Capacity	p/hour.	400	2000
Product	L x W inch.	23 x 16	35 x 23
Weight	Lb.	44	110





82 ft

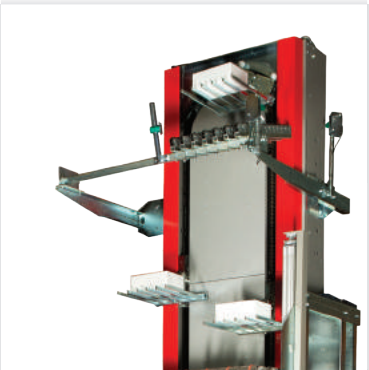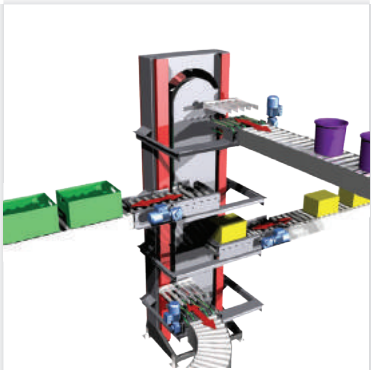





110 Lb

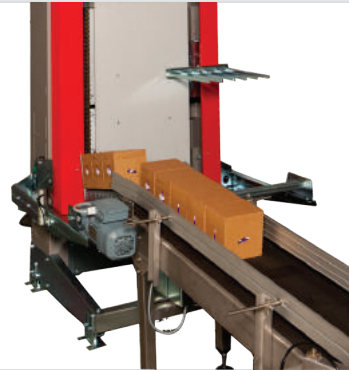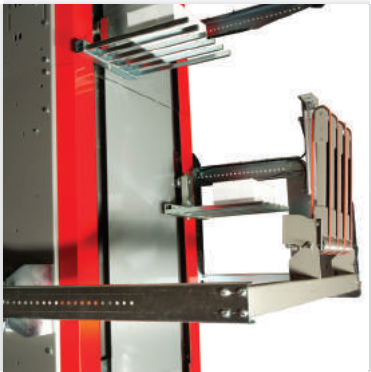




2000 / h

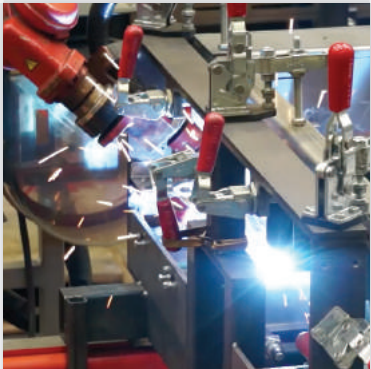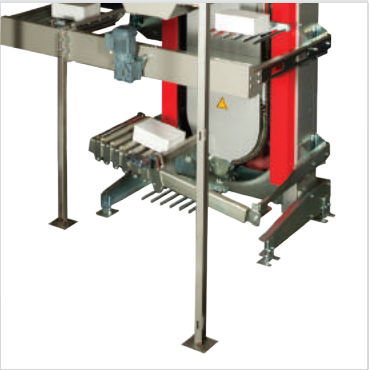



16 qs ft



Key Components for material handling:

- Palletising Modules
- Vertical Conveyors
- Pallet Packaging
- Safety Fencing

Customer: \_\_\_\_\_

E-mail: \_\_\_\_\_

Product: \_\_\_\_\_

Product sizes: ..... x ..... x ..... inch.

Capacity: min. .... p/min. max. .... p/min.

Product weight: min. .... Lb. max. .... Lb.

Product orientation infeed: Short / Long Side Leading

Product orientation outfeed: Short / Long Side Leading

Product infeed: ..... inch.

Product outfeed: ..... inch.

Infeed conveyor: Driven / Gravity

Outfeed conveyor: Driven / Gravity

Sensors: Yes / No


Safety fencing: Yes / No

Safety fencing door: Yes / No

Lay-out: Send to info@Qimarox.com

Environment conditions: \_\_\_\_\_

Remarks: \_\_\_\_\_

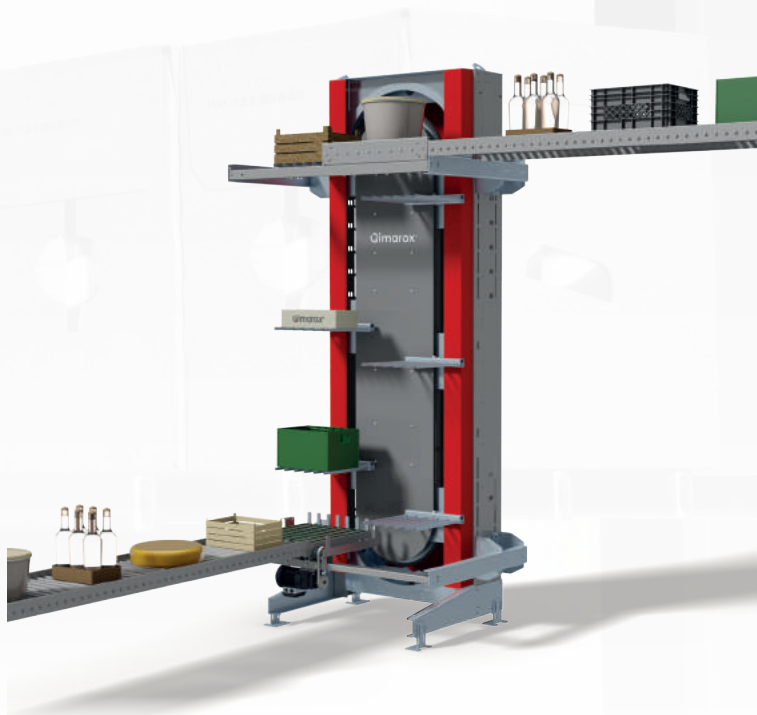

	ELEVATE	DESCEND
TOP		
BOTTOM		
	Not possible: B1, B2, C3, C4, 5F, 6F, 7G, 8G	

Suitable for

- Carton Trays • Bins • Tires • Books • Cardboard boxes • Shrink wrapped products • Soft parcels • Magazines
- Newspaper bundles • Frozen foods • Trays • Packaged bottles • Boxes • Bags • Totes

Disclaimer: This document is for informational and promotional purposes only.  
Orders are subject to the Qimarox terms and conditions and Qimarox's written confirmation. © 2018 Qimarox

Nobelstraat 43 – NL 3846 CE Harderwijk T +31 341 - 436 700 info@Qimarox.com www.Qimarox.com